




**"DE CROMVOIRTSE"**  
STAAL SERVICECENTER

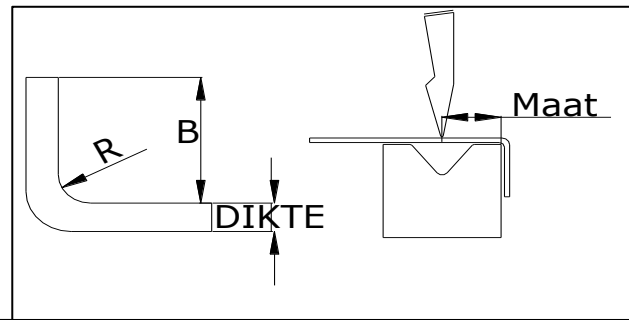


Maximale Kantlengte in meters

STAAL 37			DIKTE												
V	R	B	0,5	1	1,5	2	3	4	5	6	8	10	12	15	
8	1,5	5,0	4,0	4,0	4,0										5mm
12	2,0	8,0		4,0	4,0	4,0									8mm
16	2,7	10,0			4,0	4,0	4,0								11mm
24	3,9	14,0				4,0	4,0	4,0							14mm
30	5,0	19,5					4,0	4,0	4,0	2,8					19,5mm
40	7,0	24,5						4,0	4,0	3,8	2,1				24,5mm
60	10,0	34,0							4,0	4,0	3,1	2,0			34mm
80	13,5	45,0									4,0	2,7	1,9	1,2	45mm

kleinste inwendige maat bij meerdere zettingen

9
9
16
16
20
25
35
48

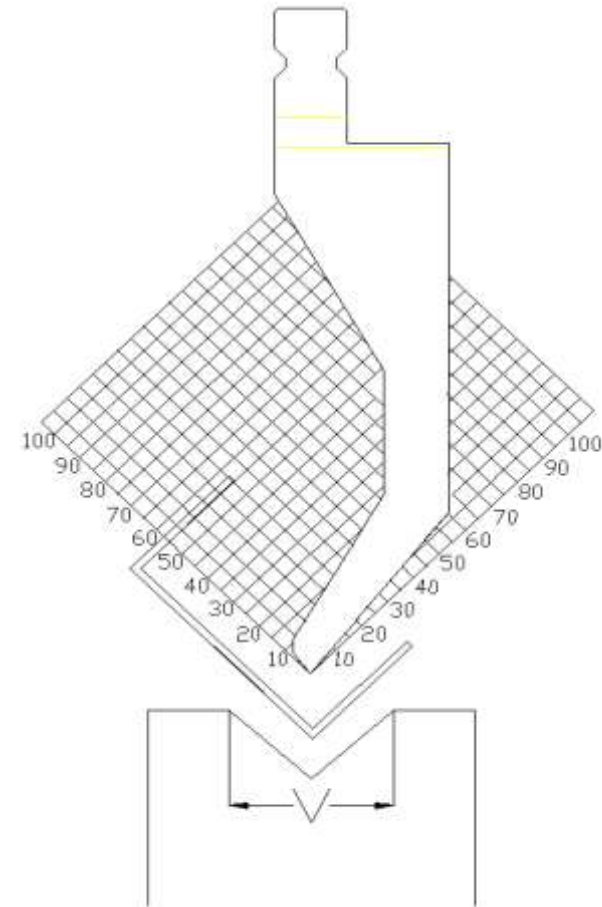

Maximale Kantlengte in meters

ST52			DIKTE												
V	R	B	0,5	1	1,5	2	3	4	5	6	8	10	12	15	
8	1,5	5,0													5mm
12	2,0	8,0													8mm
16	2,7	10,0					4,0								11mm
24	3,9	14,0					4,0	4,0							14mm
30	5,0	19,5					4,0	4,0	3,2	2,0					19,5mm
40	7,0	24,5						4,0	4,0	3,2	1,8				24,5mm
60	10,0	34,0							4,0	4,0	2,7	1,6	1,1		34mm
80	13,5	45,0									3,4	2,3	1,5	1,0	45mm

9
9
16
16
20
25
35
48

**max kantlengte= 4270 mm, tussen de wangen: 3800 mm**  
**V groef = 8 x plaatdikte** **diepte wang: 400**

V	V groef
R	Inwendige radius
B	Binnemaat incl. zetting

Maximaal te zetten U profiel  
maximaal te zetten Bakhoopte = 240mm  
(max baklengte = 4000)